


# Rubber Gasket Products

AP STYLE 475

**CURTISS -  
WRIGHT**

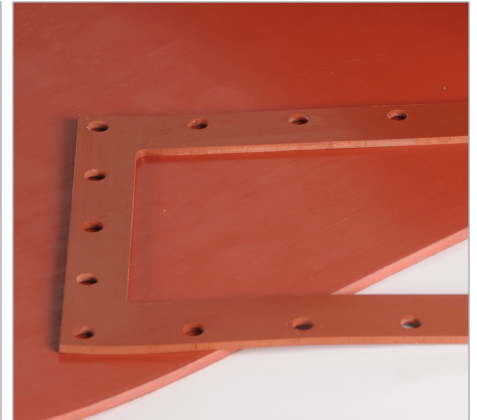

## AP Style 475

AP Services, a product and service brand of Curtiss-Wright, has state-of-the-art gasket manufacturing technology using CNC driven water jet cutters. Silicone rubber is generally non-reactive, stable, and resistant to extreme environments and temperatures.

Silicone Rubber is used in applications where physical properties are not critical but extreme temperature resistance is necessary. This rubber has great UV and ozone resistance along with excellent resistance to Fungus, Acetic Acid, Ammonia Gas (hot and cold), oils, Lime Sulfur, Methyl Ether, and Sodium Sulfate.

Style 475 is available in sheets, bulk rolls, and pre-cut gaskets.

Silicone can be manufactured in numerous different durometer ratings. Please call with your specific requirements.

This material can be manufactured in numerous different compounds and durometer ratings. Please call with your specific requirements.

## Typical Properties

<b>Temperature Range</b>
-80 °F to +400 °F
<b>Durometer</b>
60 (+/-5) Shore A
<b>Weight</b>
1/8" 8 lb./sy.
<b>ASTM Callout</b>
D 2000, AMS 3302, ZZR-765 Cl 2A & 2B Gr 60
<b>Thickness</b>
1/16", 1/8", 3/16", 1/4" (other thicknesses available upon request)
<b>Sheet Sizes</b>
36" width (other sizes available upon request)

## CONTACT INFORMATION:

18001 Sheldon Road, Middleburg Hts., OH 44130  
+1.216.267.3200 | cwuclear.com