
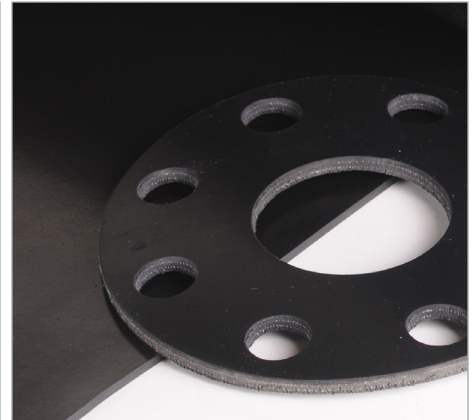


Rubber Gasket Products

AP STYLE 480

**CURTISS -
WRIGHT**

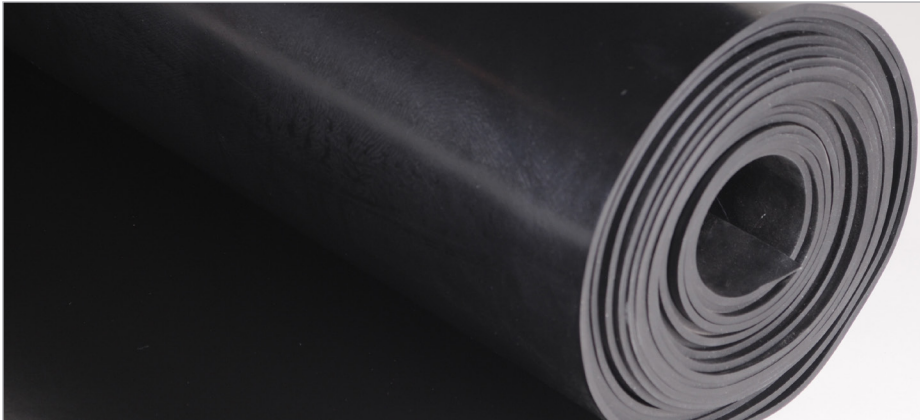

AP Style 480

AP Services, a product and service brand of Curtiss-Wright, has state-of-the-art gasket manufacturing technology using CNC driven water jet cutters. Nitrile rubber (NBR) or Buna N is the general term for acrylonitrile butadiene copolymer. Style 480 premium quality rubber is a smooth plate finish sheet manufactured from a Nitrile based Compound.

Buna N rubber has good oil and gasoline resistance, tensile strength, elongation properties, heat resistance, and low compression set. This rubber works well on many acids, petroleum, mineral and vegetable oils.

Examples of conditions where the use of Buna N should be avoided are: Fuels of high aromatic content, aromatic and chlorinated hydrocarbons, ketone, acetone, acetic acid, ethylene-ester, strong acids, brake fluids, and ozone, weather and atmospheric aging environments.

Style 480 is available in sheets, bulk rolls, and pre-cut gaskets.

This material can be manufactured in numerous different compounds and durometer ratings. Please call with your specific requirements.

Typical Properties

Temperature Range
-20 °F to +170 °F
Durometer
60 (+/-5) Shore A
Weight
1/8" 8.5 lb./sy.
ASTM Callout
D 2000
Thickness
1/32", 1/16", 1/8", 3/16", 1/4", (other thicknesses available upon request)
Sheet Sizes
36" and 48" width (other sizes available upon request)

CONTACT INFORMATION:

18001 Sheldon Road, Middleburg Hts., OH 44130
+1.216.267.3200 | cwuclear.com